


delta<sub>Δ</sub>

# Two Bike Gravity Stand

Assembly instructions RS6002 / HDRS6002

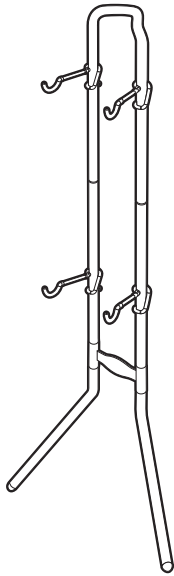


## Parts

- A** x1 — H Piece
- B** x2 — Straight poles
- C** x1 — U piece
- D** x2 — Legs
- E** x4 — Arms
- F** x6 — Bolts

## Tool Required

Phillips Head  
Screwdriver

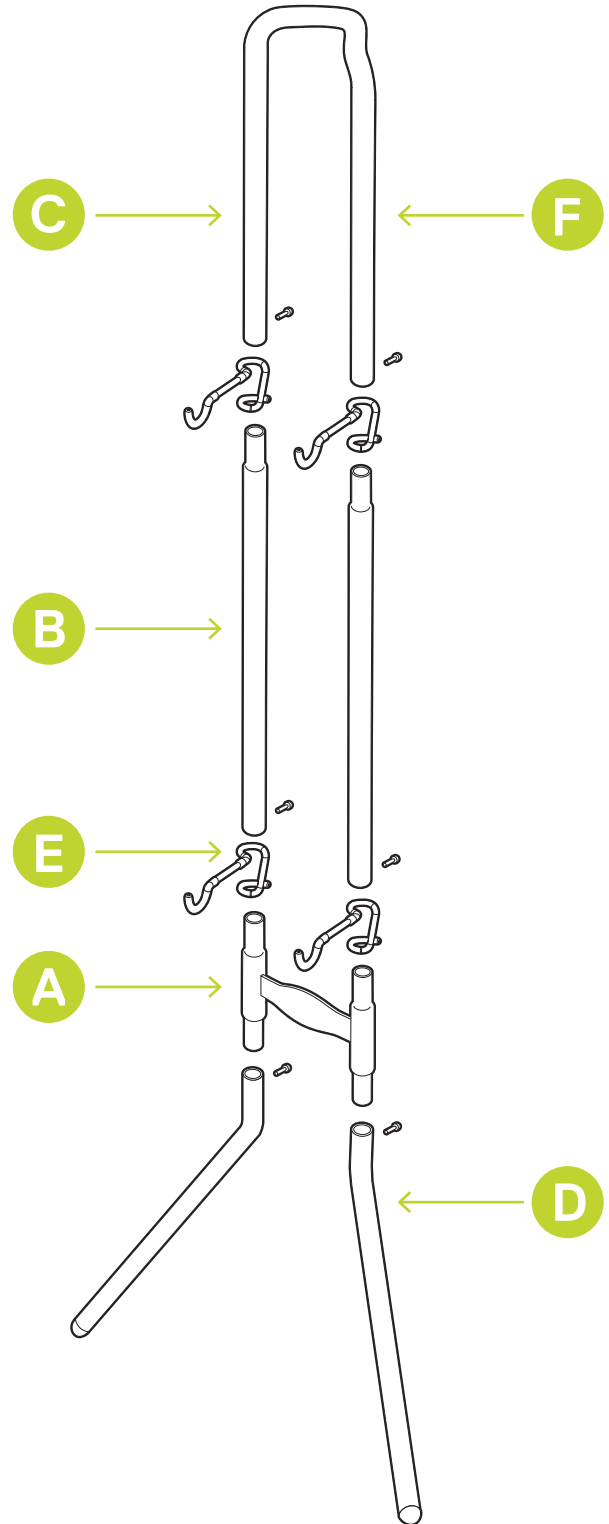


## WARNING


DO NOT EXCEED MAXIMUM TOTAL WEIGHT LIMIT OF 100 LBS (45.4 Kgs) - HDRS6002 / 80 LBS (36 Kgs) - RS6002  
MAX LOAD PER HOOK: 25 LBS (11.4 kgs) / MAX WEIGHT PER BIKE: 50LBS (22.7 kgs)

1


Do not tighten bolts until rack is fully assembled and tubes are properly aligned.



2

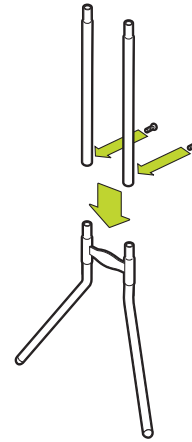


3

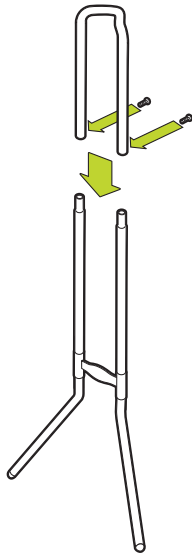



4

Tighten all bolts before using.

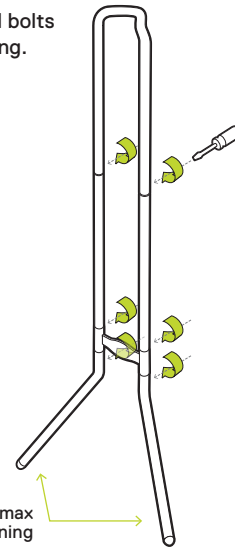


5

Adjust height of arms before they bear any weight.

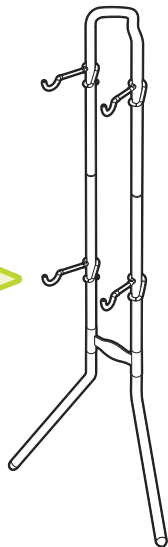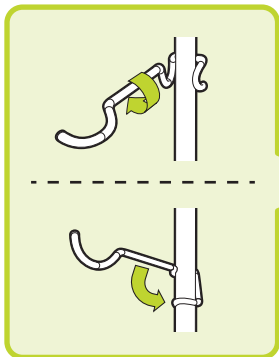

### IMPORTANT / SAFETY

In order to avoid accidental toppling of the rack, a wall stabilizing strap is supplied. This should be attached to the rack at one end with the bolt provided. The other end of the strap should be secured to the wall using a screw that is suitable for the type of wall construction. If in doubt, consult your hardware merchant for the correct method of fixing based on the wall construction.

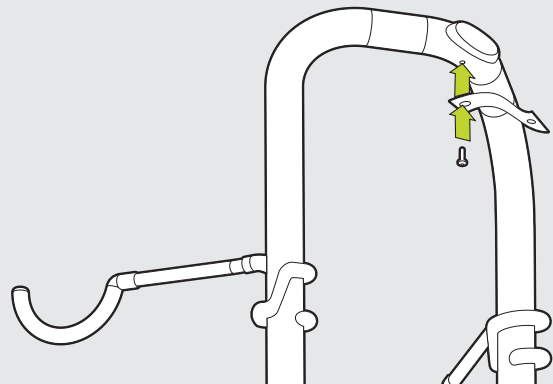

## Need help?

Email us at [service@designbydelta.com](mailto:service@designbydelta.com) & we'll help solve your issue.

## Assembly video

Visit [designbydelta.com/downloads](http://designbydelta.com/downloads)

